



REGO-FIX▲

powRgrip BT+ 兩面拘束刀桿

(BIG Daishowa 授權)



刀柄與主軸的端面接觸和AT1的錐度精度，達到最佳的剛性



刀具直徑3倍處 \leq TIR 3 μ m

特性與優點

整體精度 TIR \leq 3 μ m @ 3xD

表面粗糙度 \leq Ra 0.25

Hi-Q 動平衡系統

所有刀桿動平衡至 G2.5 @ 25,000rpm / < 1gmm


型號末碼H的刀桿均可搭配Hi-Q動平衡環使用，

最高可調整至80,000rpm

動平衡	
BT30+	平衡至 30,000rpm
BT40+	G2.5 @ 25,000rpm
BT50+	G2.5 @ 25,000rpm

抗震性佳

實現高品質加工，避免顫動

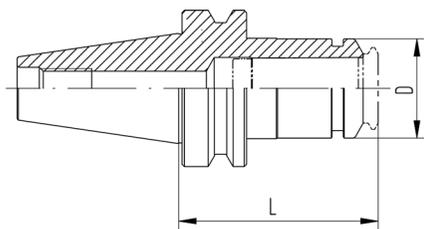

BT+ / PG (A+AD)

			(mm)
型號	D	D1	FWR
BT+ 30			
BT+ 30 / PG 10 x 080 H	16	80	285
BT+ 30 / PG 15 x 070 H	24	70	285
BT+ 30 / PG 25 x 080 H	40	80	405
BT+ 30 / PG 25 x 160 H	40	160	405 / 405
BT+ 40			
BT+ 40 / PG 10 x 080 H	16	80	285
BT+ 40 / PG 10 x 120 H	16	120	325
BT+ 40 / PG 15 x 080 H	24	80	285
BT+ 40 / PG 15 x 120 H	24	120	325
BT+ 40 / PG 25 x 080 H	40	80	405
BT+ 40 / PG 25 x 120 H	40	120	405
BT+ 40 / PG 25 x 160 H	40	160	405 / 405
BT+ 40 / PG 32 x 086	50	86	
BT+ 50			
BT+ 50 / PG 25 x 120 H	40	120	505
BT+ 50 / PG 25 x 160 H	40	160	505 / 405